




Specifications

Gold Electro-Galvanized Steel

Temperature from -50F to 275F

Loading Values Mounted in Standard 12 Gage Channel.

Products	Nut	Torque (in-lbs)	Pullout (lbs)	Slip (lbs)	
				Along	Through
390801000 - 390801012	1/4"	40	1,000	100	100
390801015 - 390801030	1/4"	40	1,000	100	100
390801035 - 390801040	1/4"	40	1,000	100	100

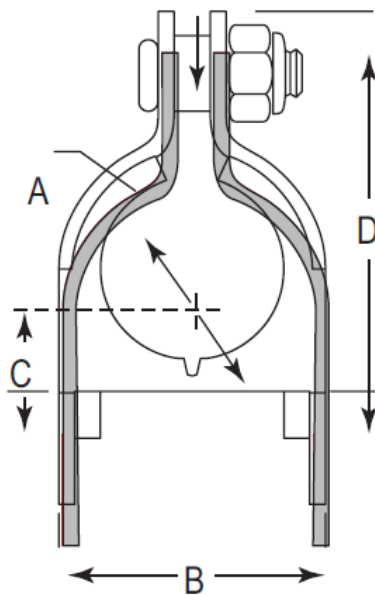

CB Part No.	Dimension "A"			Dimensions (inches)			
	*Copper and Steel Tubing	Copper Water Pipe (Nom.)	Nom. Pipe Size	A	B	C	D
390801000	1/4"	-	-	0.25	0.62	0.27	0.98
390801002	3/8"	1/4"	-	0.37	0.82	0.33	1.13
390801004	1/2"	3/8"	-	0.50	0.94	0.40	1.34
390801005	5/8"	1/2"	-	0.62	1.06	0.46	1.54
390801006	3/4"	5/8"	-	0.75	1.20	0.52	1.68
390801007	7/8"	3/4"	-	0.87	1.31	0.58	1.82
390801010	1-1/8"	1"	-	1.12	1.57	0.70	2.08
390801012	1-3/8"	1-1/4"	-	1.37	1.82	0.83	2.34
390801015	1-5/8"	1-1/2"	-	1.62	2.07	0.96	2.60
390801017	1-7/8"	-	1-1/2"	1.90	2.32	1.09	2.86
390801020	2-1/8"	2"	-	2.12	2.57	1.27	3.23
390801022	2-3/8"	-	2"	2.37	2.82	1.41	3.67
390801025	2-5/8"	2-1/2"	-	2.62	3.07	1.53	3.92
390801030	3-1/8"	3"	-	3.12	3.57	1.78	4.42
390801035	3-5/8"	3-1/2"	-	3.62	4.20	2.03	5.11
390801040	4-1/8"	4"	-	4.12	4.57	2.34	5.54

*Tube O.D. is Cushion I.D. ; Design load deflection data available on request.