

## MATERIAL SPECIFICATION SHEET

### Stainless Steel Crimp Sleeve



The Stainless Steel Crimp Sleeve is easy to install and designed for use with ASTM F2769/ASTM F2623 PE-RT and ASTM F876/ASTM F877 PEX tubing with ASTM F2159 and ASTM F1807 fittings. It delivers exceptional corrosion resistance and long-term reliability, making it ideal for both potable water and radiant (hydronic) heating systems.

- Durable stainless steel construction, SS304
- Visual indicator ensures proper pipe depth and alignment
- Provides a highly secure, corrosion-resistant connection
- For exclusive use with stainless steel press sleeve crimper tools.  
Not intended for use with copper ring crimper tools.

### Available Sizes

1/2", 3/4", 1", 1 1/4", 1 1/2", & 2"




ASTM F877, CSA B137.5  
CTS SDR-9




### Application


Intended for use in 100 psi (689.5 kPa) cold and hot water distribution systems operating at temperatures up to and including 180 °F (82 °C). To be installed in accordance with manufacturer's instruction and the latest edition of the Uniform Plumbing Code and National Plumbing Code of Canada.

### Dimensions


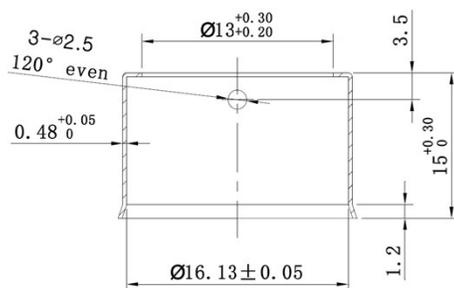


1/2" Stainless Steel Crimp Sleeve (mm)


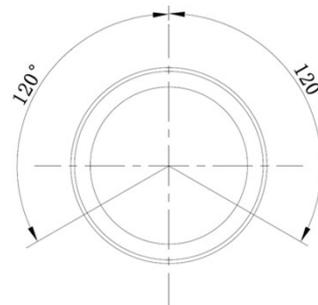


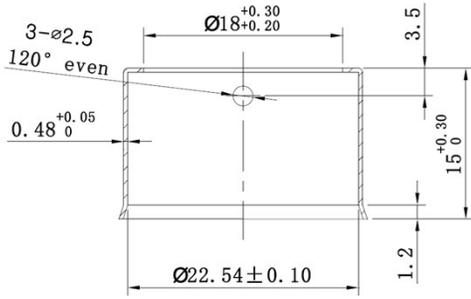



3/4" Stainless Steel Crimp Sleeve (mm)

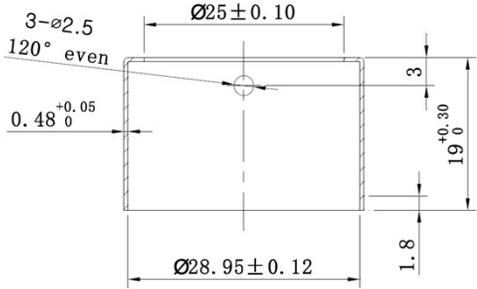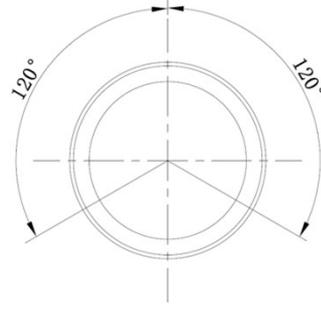



1" Stainless Steel Crimp Sleeve (mm)

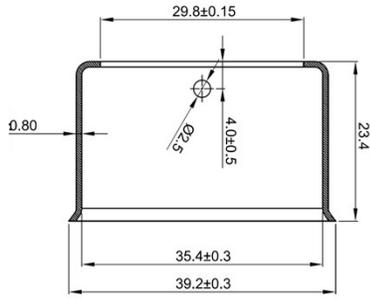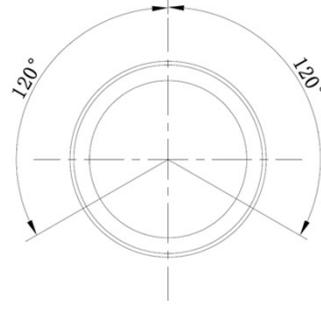

1 1/4" Stainless Steel Crimp Sleeve (mm)

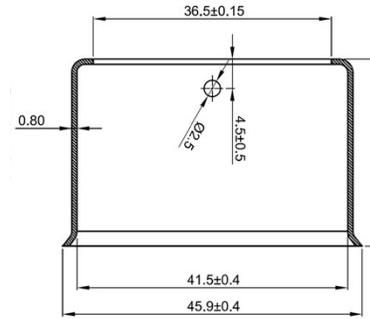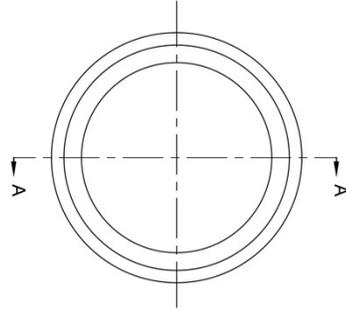

1 1/2" Stainless Steel Crimp Sleeve (mm)

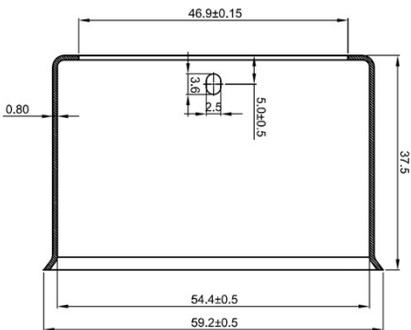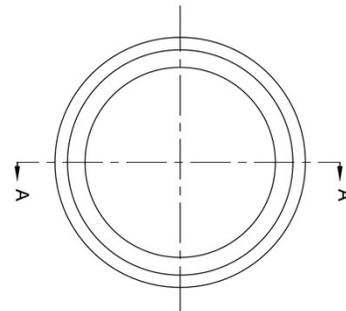

2" Stainless Steel Crimp Sleeve (mm)

